

Technical Data Reference

Table of Contents

Technical Data Reference	1
Table of Contents	1
PUMP SELECTION.....	2
EQUIVALENT RESISTANCE OF VALVES AND FITTINGS	2
APPROXIMATE VISCOSITIES OF	3
COMMON LIQUID AND SEMI-SOLID MATERIALS	3
VISCOSITY CONVERSION CHART	4
VISCOSITY CONVERSION CHART (continued).....	5
TABLE ON pH VALUES.....	6
ACIDS	6
Compressed Air Data	8
IRON PIPE AND STEEL TUBING DATA	10
RELATIVE SIZE OF MICRONIC PARTICLES	15

PUMP SELECTION

Following the analysis of line flow conditions through the use of the nomograph, and arrive at a total line pressure loss, consideration should then be given to pressure loss created by valves, fittings and elevation of lines.

If a sufficient number of valves and fittings are incorporated in the system to materially affect the total line loss, add to the total line length, the equivalent length of the line of each valve or fitting.

EQUIVALENT RESISTANCE OF VALVES AND FITTINGS

Nominal Pipe Size Inches	Inside Diameter Inches	Equivalent Length of Standard Pipe in Feet							
		Gate Valve	Globe Valve	Angle Valve	45° Elbow	90° Elbow	180° Close Ret.	Tee Thru Run	Tee Thru Branch
1/2	0.622	0.41	18.5	9.3	0.78	1.67	3.71	0.93	3.33
3/4	0.824	0.54	24.5	12.3	1.03	2.21	4.90	1.23	4.41
1	1.049	0.69	31.2	15.6	1.31	2.81	6.25	1.56	5.62
1 1/4	1.380	0.90	41.0	20.5	1.73	3.70	8.22	2.06	7.40
1 1/2	1.610	1.05	48.0	24.0	2.15	4.31	9.59	2.40	8.63
2	2.067	1.35	61.5	30.8	2.59	5.55	12.3	3.08	11.6
2 1/2	2.469	1.62	73.5	36.8	3.09	6.61	14.7	3.68	13.2
3	3.068	2.01	91.5	45.8	3.84	8.23	18.2	4.57	16.4
4	4.026	2.64	120	60.0	5.03	10.8	23.9	6.00	21.6

The pressure loss per foot of conduit, as found on the nomograph, when multiplied by the total line length (actual length and length added for the valves and fittings) will give the pressure loss of the conduit.

Pressure loss due to elevations in the fluid line is accounted by adding 0.5 psi per foot of vertical rise to the pressure loss calculation.

As specified gravity increases beyond 1.0 psi (water). The pressure loss per foot may also increase

MINIMUM FLOW RATE

Circulation of paints and similar materials containing pigments or filters requires fluid flow velocities high enough to maintain the contained particles in suspension. A velocity of 60 feet per minute has been accepted as a minimum velocity to maintain suspension. For convenience, minimum flow rates for various size conduits have been calculated and tabulated.

Circulating Line Size	Minimum Flow Rate
1/4" std. pipe	0.325 gpm
3/8" std pipe	0.595 gpm
5/8" O.D. x .035 wall tube	0.75 gpm
1/2" std. pipe	0.95 gpm
7/8" O.D. x .035" wall tube	1.58 gpm
3/4" std. pipe	1.66 gpm
1" O.D. x .035" wall tube	2.12 gpm
1" std. pipe	2.69 gpm
1 1/4" std. pipe	4.66 gpm
1 1/2" std. pipe	6.35 gpm
2" std pipe	10.5 gpm

To calculate minimum flow rates for other conduit sizes:

Flow rate (GPM) — 3.11 x Inside Area, In 2

APPROXIMATE VISCOSITIES OF COMMON LIQUID AND SEMI-SOLID MATERIALS

Common Liquid and Semi-Solid Materials (Centipoise at 70°)	Viscosity In Centipoise
ACETONE3
ADIPRENE (URETHANE)	35,000
BENZINE5
CORN SYRUP	100,000
ETHYLENE GLYCOL	16
GLUE (HOT MELT)	30,000,000
HONEY	3,000
INK	45,000
KETCHUP	*50,000
LACQUER	1,100-250
LINSEED OIL (BOILED)	64
LINSEED OIL (RAW)	28
METHYL ETHYL KETONE4
MILK	3
MUSTARD	*70,000
OIL (AUTO-LUBRICATING)	
SAE 10	65
SAE 20	125
SAE 30	200
SAE 40	319
SAE 50	540
SAE 60	1,000
SAE 70	1,600
SAE 80 (Transmission Grades)	240
SAE 90 (Transmission Grades)	590
SAE 140 (Transmission Grades)	2,200
OIL — CASTOR	1,000-240
OIL — CORE	29
OIL — CORN	72
OIL CRUDE	15
OIL SOYBEAN	160
PEANUT BUTTER	*250,000
SALAD DRESSING	*250,000
SHORTENING	*1,200,000
SULPHURIC ACID (100%)2
SYRUP (DARK)	3,200
SYRUP (LIGHT)	2,500
TOLUOL6
TOMATO PASTE	*190,000
TURPENTINE	1
VARNISH	240
VASELINE PETROLEUM JELLY	64,000
WATER	1
XYLOL6

Viscosity given is indicative of the viscosity RANGE of the material in a static state. The material is extremely thixotropic and the viscosity will decrease rapidly when the material is moved, agitated or worked in any manner.

VISCOSITY CONVERSION CHART

Poise	CENTIPOISE	DuPont Parlin 7	DuPont Parlin 10	Fisher 1	Fisher 2	Ford Cup 3	Ford Cup 4	Gardner Holdt Bubble	Gardner Lithographic	Krebs Units KU	Saybolt Universal SSU	Zahn 1	Zahn 2	Zahn 3	Zahn 4	Zahn 5	Sears Craftsman Cup	Redwood No. 1 Sec.	Engler Degrees	Saybolt Furol Sec.	Redwood No. 2 Sec.	
.1	10	27	11	20			5	A-4			60	30	16					54	1.84			
.15	15	30	12	25			8	A-3			80	34	17					70	2.35			
.2	20	32	13	30	15	12	10				100	37	18					98	2.90			
.25	25	37	14	35	17	15	12	A2			130	41	19					106	3.48			
.3	30	43	15	39	18	19	14	A1			160	44	20					125	4.10			
.4	40	50	16	50	21	25	18	A			210	52	22				19	165	5.39			
.5	50	57	17		24	29	22			30	260	60	24				20	203	6.78			
.6	60	64	18		29	33	25	B		33	320	68	27				21	245	8.05	30.8		
.7	70		20		33	36	28			35	370		30				23	286	9.40	35.0	30.05	
.8	80		22		39	41	31	C		37	430		34				24	327	10.60	40.0	34.00	
.9	90		23		44	45	32			38	480		37	10			26	368	11.80	44.7	37.85	
1.0	100		25		50	50	34	D		40	530		41	12	10		27	409	14.25	47.8	41.90	
1.2	120		30		62	58	41	E		43	580		49	14	11		31	485	15.95	58.2	49.80	
1.4	140		32			66	45	E		46	690		58	16	13		34	570	18.55	66.8	57.90	
1.6	160		37				50	G		48	790		66	18	14		38	645	21.10	76.4	66.00	
1.8	180		41				54		000	50	900		74	20	16		40	735	23.90	86.3	74.15	
2.0	200		45				58	H		52	1000		82	23	17	10	44	815	26.75	95.8	82.35	
2.2	220						62	I		54	1100			25	18	11		900	28.15	104.6	90.00	
2.4	240						65	J		56	1200			20	12	12		985	33.60	113.5	97.75	
2.6	260						68			58	1280			30	21	13		1060	34.65	124.5	105.60	
2.8	280						70	K		59	1380			32	22	14		1140	37.25	137.5	114.90	
3.0	300						74	L		60	1475			34	24	15		1235	39.85	143.2	123.75	
3.2	320							M			1530			36	25	16		1300	42.35	151.8	131.65	
3.4	340							N			1630			39	26	17		1390	45.00	161.3	139.50	
3.6	360							O		62	1730			41	28	18		1465	47.75	171.5	149.00	
3.8	380										1850			43	29	19		1550	50.10	180.0	157.55	
4.0	400							P		64	1950			46	30	20		1635	52.45	189.5	166.35	
4.2	420										2050			48	32	21		1695	52.95	199.5	171.65	
4.4	440							Q			2160			50	33	22		1790	54.20	209.5	183.50	
4.6	460							R		66	2270			52	34	23		1837	60.60	218.4	188.65	
4.8	480								00	67	2380			54	36	24		1950	63.85	228.9	198.75	
5.0	500							S		68	2480			57	37	25		2045	65.95	239.4	208.85	
5.5	550							T		69	2660			63	40	27		2240	72.85	259.7	229.95	
6.0	600							U		71	2900			68	44	30		2433	79.50	287.6	248.50	
7.0	700									74	3375				51	35		2850	92.30	332.4	289.60	
8.0	800								0	77	3880				58	40		3270	106.45	380.1	329.75	
9.0	900							V		81	4300				64	45		3690	119.50	427.8	368.85	
10.0	1000							W		85	4600					49		4000	133.50	479.6	408.70	
11.0	1100									88	5200					55						

VISCOSITY CONVERSION CHART (continued)

Poise	CENTIPOISE	DuPont Parlin 7	DuPont Parlin 10	Fisher 1	Fisher 2	Ford Cup 3	Ford Cup 4	Gardner Holdt Bubble	Gardner Lithographic	Krebs Units KU	Saybolt Universal SSU	Zahn 1	Zahn 2	Zahn 3	Zahn 4	Zahn 5	Sears Craftsman Cup	Redwood No. 1 Sec.	Engler Degrees	Saybolt Furol Sec.	Redwood No. 2 Sec.	
12.0	1200									92	5620											
13.0	1300							X		95	6100											
14.0	1400								1	96	6480											
15.0	1500									98	7000											
16.0	1600									100	7500											
17.0	1700									101	8000											
18.0	1800							Y			8500											
19.0	1900										9000											
20.0	2000									103	9400											
21.0	2100										9850											
22.0	2200										10300											
23.0	2300							Z	2	105	10750											
24.0	2400									109	11200											
25.0	2500							Z-1		114	11600											
30.0	3000									121	14500											
35.0	3500							Z-2	3	129	16500											
40.0	4000									133	18500											
45.0	4500							Z-3		136	21000											
50.0	5000										23500											
55.0	5500										26000											
60.0	6000							Z-4	4		28000											
65.0	6500										30000											
70.0	7000										32500											
75.0	7500										35000											
80.0	8000										37000											
85.0	8500										39500											
90.0	9000										41000											
95.0	9500										43000											
100.0	10000							Z-5	5		46500											
110.0	11000										51000											
120.0	12000										55500											
130.0	13000										60000											
140.0	14000										65000											
150.0	15000							Z-6			69500											
160.0	16000										74000											
170.0	17000										80000											
180.0	18000										83500											
190.0	19000										88000											
200.0	20000										93000											
300.0	30000										140000											

All viscosity comparisons are as accurate as possible with existing information. Comparisons are made with materials having a specific gravity of one.

To extend range of only the kinematic Saybolt Universal, Redwood No. 1 and Engler Scales: Multiply by 10, the viscosities on these scales between 100 and 1000 Centistokes on the Kinematic Scale and the corresponding viscosities on the other 3 scales. For further extension multiply these scales as above by 100 or a higher power of 10.

(Example:
1500 Centistokes = 150 x 10 CS695 x 10 SUS)

TABLE ON pH VALUES

PH VALUES

The acidity or alkalinity of a solution is expressed by its pH Value. A neutral solution such as water has a pH value of 7.0. Decreasing pH values from 7.0 to 0.0 indicated increasing acidity and increasing pH values from 7.0 to 14.0 indicated increasing alkalinity. Since the pH value denotes the acidity or alkalinity of a liquid, it gives some indication of the materials required in constructing a pump to handle the liquid. The pH value alone, however, is not conclusive. Many other factors must be considered. However, as an approximate guide, Table A may be found helpful.

Table A

PH Value	Material of Construction
0 to 4	Corrosion Resistant Alloy Steels.
4 to 6	All Brone
6 to 8	Bronze Fitted or Standard Fitted.
8 to 10	All Iron
10 to 14	Corrosion Resistant Alloys.

The following tables give approximate pH values. From "Modern pH and Chlorine Control", W.A. Taylor & Co., by permission.

TABLE OF APPROXIMATE pH VALUES.

ACIDS			
Hydrochloric, N	0.1	Formic, 0.1 N	2.3
Hydrochloric, .01N	1.1	Lactic, 0.1N	2.4
Hydrochloric, 0.01N	2.0	Acetic, N	2.4
Sulfuric, N	0.3	Acetic, 0.1N	2.9
Sulfuric, 0.1N	1.2	Acetic, 0.01N	3.4
Sulfuric, 0.01N	2.1	Benzoic, 0.01N	3.1
Orthophosphoric, 0.1N	1.5	Alum, 0.1N	3.2
Sulfurous, 0.1N	1.5	Carbonic, (saturated)	3.8
Oxalic, 0.1N	1.6	Hydrogen sulfide, 0.1N	4.1
Tartaric, 0.1N	2.2	Arsenious (saturated)	5.0
Malic, 0.1N	2.2	Hydrocyanic, 0.1N	5.1
Citric, 0.1N	2.2	Boric, 0.1N	5.2
Bases			
Sodium Hydroxide, N	14.0	Ammonia, N	11.6
Sodium Hydroxide, 0.1N	13.0	Ammonia, 0.1N	11.1
Sodium Hydroxide, 0.01N	12.0	Ammonia, 0.01N	10.6
Potassium hydroxide, N	14.0	Potassium cyanide, 0.1N	11.0
Potassium hydroxide, 0.1N	13.0	Magnesia (saturated)	10.5
Potassium hydroxide, 0.01N	12.0	Sodium sesquicarbonate, 0.1 N	10.1
Sodium metasilicate, 0.1N	12.6	Ferrous hydroxide (saturated)	9.5
Lime (saturated)	12.4	Calcium carbonate (saturated)	9.4
Trisodium phosphate, 0.1N	12.0	Borax, 0.1N	9.2
Sodium carbonate, 0.1N	11.6	Sodium bicarbonate, 0.1N	8.4
BIOLOGIC MATERIALS			
Blood, plasma, human	7.3-7.5	Duodenal, contents, human	4.8-8.2
Spinal fluid, human	7.3-7.5	Feces, human	4.6-8.4
Blood whole, dog	6.9-7.2	Urine, humane	4.8-8.4
Saliva, human	6.5-7.5	Milk, human	6.6-7.6
Gastric contents, human	1.0-3.0	Bile, human	6.8-7.0


TABLE ON pH VALUES CONTINUED

FOODS

Apples	2.9-3.3	Milk, cows	6.3-6.6
Apricots	3.6-4.0	Olives	3.6-3.8
Asparagus	5.4-5.8	Oranges	3.0-4.0
Bananas	4.5-4.7	Oysters	6.1-6.6
Beans	5.0-6.0	Peaches	3.4-3.6
Beers	4.0-5.0	Pears	3.6-4.0
Blackberries	4.9-5.5	Peas	5.8-6.4
Bread, white	5.0-6.0	Pickles, sour	3.0-3.4
Beets	4.9-5.5	Pickles, dill	3.2-3.6
Butter	6.1-6.4	Pimento	4.6-5.2
Cabbage	5.2-5.4	Plums	2.8-3.0
Carrots	4.9-5.3	Potatoes	5.6-6.0
Cheese	4.8-6.4	Pumpkin	4.8-5.2
Cherries	3.2-4.0	Raspberries	3.2-3.6
Cider	2.9-3.3	Rhubarb	3.1-3.2
Corn	6.0-6.5	Salmon	6.1-6.3
Crackers	6.5-8.5	Sauerkraut	3.4-3.6
Dates	6.5-8.5	Shrimp	6.8-7.0
Eggs, fresh white	7.6-8.0	Soft drinks	2.0-4.0
Flour, wheat	5.5-6.5	Spinach	5.1-5.7
Gooseberries	2.8-3.0	Squash	5.0-5.4
Grapefruit	3.0-3.3	Strawberries	3.0-3.5
Grapes	3.5-4.5	Sweet potatoes	5.3-5.6
Hominy (lye)	6.8-8.0	Tomatoes	4.0-4.4
Jams, fruit	3.5-4.0	Tuna	5.9-6.1
Jellies, fruit	2.8-3.4	Turnips	5.2-5.6
Lemons	2.2-2.4	Vinegar	2.4-3.4
Limes	1.8-2.0	Water, drinking	6.5-8.0
Maple syrup	6.5-7.0	Wines	2.8-3.8

pH FACTOR

The pH of a solution is a measurement of its hydrogen ion Concentration and is indicative of its degree of acidity or Alkalinity. Values of pH range from 0 to 14.0 with the middle Of the range, 7.0, being neutral

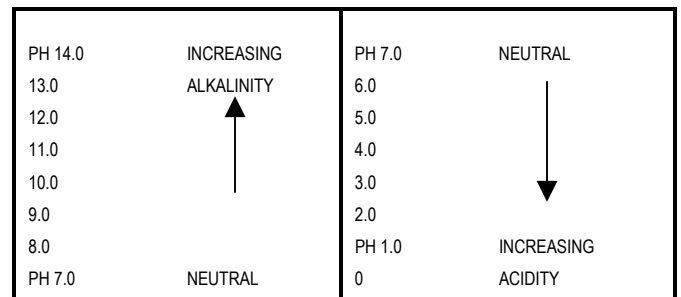


Compressed Air Data

When a pump uses 10 cfm at 100 psi, it is using 10 cubic feet per minute of free air that has been compressed to 2.46 cubic feet at 100 psi. The pump is then actually using 2.46 cubic feet at 100 psi, but the measurement of its consumption is on the basis of "free air" taken into the compressor of 10 cmf.

Compressed air is measured on the basis of the volume used per unit time (cubic feet per minute) at a given pressure (psi). The reference to volume of compressed air is always a measurement of air in its free state; i.e., atmospheric condition.

The description above illustrates the economical benefit of operating a pump at the lowest air pressure that will adequately meet the needs of pump output.

Compressed air is not unlike flowing fluids in that pressure is lost in transmission piping and hoses. The following chart aids in choosing piping and hose to minimize pressure drop in air lines.

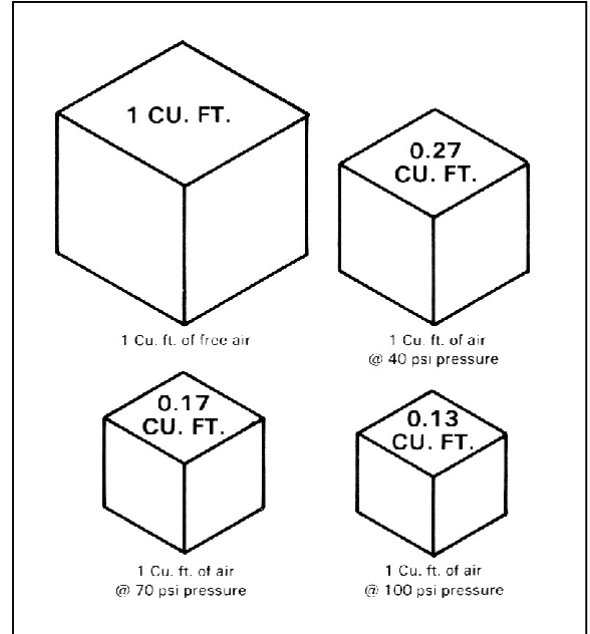

FRICION OF AIR IN PIPES

Air pressure loss, psi in 100 ft. of clean commercial steel pipe.

CFM of Free Air	Nominal Pipe Diameter														
	½ Inch			¾ Inch			1 Inch			1 ¼ Inch			1 ½ Inch		
	80lb	100lb	125lb	80lb	100lb	125lb	80 lb	100lb	125lb	80lb	100lb	125lb	80 lb	100lb	125lb
10	.46	.38	.31	.11	.09	.08	.04	.03	.02	.0086	.0071	.0058			
20	1.74	1.42	1.17	.41	.34	.28	.13	.10	.08	.032	.026	.021	.014	.012	.010
30	3.84	3.13	2.54	.90	.74	.60	.28	.23	.19	.068	.056	.046	.031	.026	.021
40	6.63	5.55	4.53	1.55	1.28	1.05	.46	.38	.31	.116	.096	.079	.053	.044	.036
50	10.7	8.65	7.01	2.42	2.00	1.62	.73	.60	.49	.18	.146	.120	.081	0.67	.055
60				3.47	2.84	2.33	1.02	.84	.69	.25	.21	.17	.12	.095	.070
70				4.73	3.85	3.14	1.36	1.12	.92	.34	.28	.23	.16	.13	.10
80				6.14	5.01	4.08	1.76	1.44	1.18	.44	.36	.30	.20	.16	.14
90				7.75	6.40	5.17	2.23	1.85	1.49	.55	.45	.37	.25	.20	.17
100				9.62	7.80	6.33	2.69	2.21	1.81	.66	.55	.45	.30	.25	.20
125				15.5	12.4	9.8	4.18	3.41	2.79	1.03	.85	.69	.46	.38	.32
150				23.0	18.1	14.4	5.75	4.91	3.99	1.47	1.20	.99	.65	.54	.44
175							8.10	6.80	5.45	2.00	1.64	1.32	.90	.73	.60
200							10.9	8.79	7.11	2.58	2.12	1.73	1.15	.95	.70
250										4.05	3.30	2.67	1.82	1.48	1.70

COMPRESSED AIR DATA CONTINUED

FRICITION OF AIR IN HOSE

(including drop through standard hose fittings)

Air Flow Cubic Feet Per Minute	10' of 1/4" Hose	8' of 5/16" Hose	10' of 3/8" Hose	12 1/2' of 1/2" Hose	25' of 1/2" Hose	50' of 1/2" Hose	12 1/2' of 3/4" Hose	25' of 3/4" Hose	50' of 3/4" Hose	50' of 1/2" Hose 10' of 1/4" Hose	50' of 1/2" Hose 10' of 3/8" Hose	50' of 1/2" Hose 8' of 5/16" Hose	50' of 1/2" Hose 12 1/2' of 1/2" Hose	50' of 3/4" Hose 25' of 1/2" Hose	50' of 3/4" Hose
	Pressure Drop - Pounds per Sq. In. — Based on 100 Pounds per Sq. In. Line Pressure														
10 to 11	5.0	.9								5.3	.7	1.4			
11 to 12	5.9	1.0								6.2	.8	1.6			
12 to 13	6.8	1.2	.4							7.2	.9	1.9			
13 to 14	8.0	1.4	.5							8.4	1.1	2.2			
14 to 15	9.3	1.6	.6							9.8	1.3	2.5			
15 to 16		1.9	.7								1.5	2.9			
16 to 18		2.4	.8								1.9	3.5	1.7		
18 to 20		3.0	1.0								2.4	4.5	2.0		
20 to 25		4.3	1.4	.7	1.0	1.3					3.5	6.4	2.6	1.3	
25 to 30		6.6	2.1	1.0	1.5	2.3					5.2	9.8	3.8	1.9	
30 to 35		9.5	3.1	1.3	2.1	3.6					7.3		5.3	2.6	
35 to 40			4.2	1.7	2.8	5.2					9.6		7.1	3.5	
40 to 50			6.3	2.4	4.1	8.0								5.2	1.8
50 to 60			9.6	3.7	6.3									7.8	2.3
60 to 70				5.3	9.0		.9	1.4	1.9						3.0
70 to 80				7.1			1.1	1.7	2.5						3.7
80 to 90				9.0			1.4	2.2	3.2						4.6
90 to 100							1.7	2.7	4.0						5.0
100 to 120							2.3	3.5	5.6						7.9
120 to 140							3.2	4.8	8.0						
140 to 160							4.3	6.6							
160 to 180							5.6	8.7							
180 to 200							7.2								

IRON PIPE AND STEEL TUBING DATA

Standard iron pipe is designated by its nominal inside diameter namely, 1/8", 1/4", 3/8", 1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3", ect. While errors in the early manufacture of pipe have caused inconsistencies in the smaller pipe inside diameters, the size designations have still been retained.

The weights of pipe; standard, extra heavy, and double extra heavy are in common use and all three have the same outside diameter. The added wall thickness for the heavier pipe therefore reduces the inside diameter. Cast steel fittings are recommended for extra heavy pipe and forged steel fittings for double extra pipe

Steel tubing is designated by its outside diameter and its wall thickness. While it is available in a wide range of sizes, 3/8", 1/2", 5/8", 7/8" and 1" O.D., tubes are quite commonly used as fluid lines. Choice of wall thickness is practically unlimited and is governed by the working pressures encountered

Hydraulic Tubing

When Power Pack is located within 100 feet from pumps, the following tubing sizes will be adequate:

Hydraulic Power Supply Flow Rate	Supply Tubing Requirements	Return Tubing Requirements
0-12 GPM	3/4" x .065" Wall	1" x .083" Wall
12-20 GPM	1" x .083" Wall	1 1/4" x .109" Wall
20-30 GPM	1 1/8" x .095" Wall	1 1/2" x .120" Wall
30-40 GPM	1 1/4" x .120" Wall	1 3/4" x .155" Wall
40-50 GPM	1 1/2" x .120" Wall	2" x .190" Wall

NOTE: When power supply is located within 100' – 200' of pumps, use one size larger tubing.

STEEL TUBING — MAXIMUM WORKING PRESSURES (P.S.I.)

O.D	WALL THICKNESS												
	.025"	.028"	.032"	.035"	.042"	.049"	.058"	.065"	.072"	.083"	.095"	.109"	.125"
1/8"	6000	6700	7680	84.0	9920	11750	X	X	X	X	X	X	x
3/16"	4000	4470	5100	5610	6750	7850	X	X	X	X	X	X	x
1/4"	2980	3350	3830	4200	5040	5890	7000	7850	X	X	X	X	x
5/16"	2410	2690	3080	3370	4040	4710	5610	6290	6950	8010	X	X	x
3/8"	1990	2240	2560	2800	3360	3920	4660	5240	5790	6660	7640	8720	9990
13/32"	1845	2070	2360	2585	3100	3620	4285	4800	5320	6130	7015	8050	9235
7/16"	1715	1920	2190	2400	2880	3360	4000	4500	4960	5720	6550	7490	8580
1/2"	1490	1675	1920	2100	2520	2940	3500	3925	4340	5000	5720	6450	7500
9/16"	1330	1490	1705	1870	2240	2620	3110	3490	3860	4450	5090	5810	6660
5/8"	1200	1340	1535	1680	2020	2350	2800	3140	3470	4000	4580	5230	6000
11/16"	1090	1220	1395	1530	1830	2135	2530	2835	3140	3620	4145	4755	5455
3/4"	1000	1120	1280	1400	1640	1960	2320	2600	2880	3320	3800	4360	5000
7/8"	890	960	1090	1200	1440	1680	1985	2225	2465	2845	3255	3740	4285
1"	750	840	960	1050	1260	1470	1740	1950	2160	2490	2850	3270	3750
1 1/8"	665	747	854	935	1120	1310	1545	1735	1920	22115	2535	2910	3330

NOTE: The values above are based on an allowable fibre stress of 15,000 psi. For approximate bursting pressures, multiply these factors of 3.3.

STANDARD PIPE DATA (SCHEDULE 40)

NOMINAL DIAMETER (INCHES)	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3
ACTUAL OUTSIDE DIAMETER (INCHES)	0.405	0.540	0.675	0.840	1.050	1.315	1.660	1.90	2.375	2.875	3.5
ACTUAL INSIDE DIAMETER (OUTSIDE)	0.269	0.364	0.493	0.622	0.824	1.049	1.380	1.61	2.067	2.469	3.068
INSIDE AREA (Square Inches)	0.06	0.10	0.19	0.30	0.53	0.86	1.49	2.04	3.36	4.79	7.39
WORKING Pressure* (P.S.I.)	2820	2172	1797	1731	1434	1348	1124	1017	864	940	822
U.S. GALLONS IN ONE LINEAL FOOT	0.003	0.005	0.010	0.016	0.028	0.045	0.077	0.106	0.174	0.248	0.383
FEET OF PIPE CONTAINING ONE U.S. GALLON	333.7	185.1	100.8	63.33	36.12	22.21	12.87	9.45	5.74	4.02	2.59
WEIGHT PER FOOT (POUNDS)	0.244	0.424	0.567	0.850	1.13	1.68	2.27	2.72	3.65	5.79	7.58

EXTRA HEAVY PIPE DATA (SCHEDULE 80)

NOMINAL DIAMETER (INCHES)	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3
ACTUAL OUTSIDE DIAMETER (INCHES)	0.405	0.540	0.675	0.840	1.050	1.315	1.660	1.90	2.375	2.875	3.5
ACTUAL INSIDE DIAMETER (OUTSIDE)	0.215	0.302	0.423	0.546	0.742	0.957	1.278	1.500	1.939	2.323	2.90
INSIDE AREA (Square Inches)	0.036	0.071	0.141	0.231	0.425	0.710	1.28	1.75	3.0	4.24	6.6
WORKING Pressure* (P.S.I.)	3977	2937	2488	2333	1954	1814	1533	1403	1222	1280	1142
U.S. GALLONS IN ONE LINEAL FOOT	0.0018	0.0037	0.008	0.012	0.022	0.0375	0.0675	0.09	0.15	0.225	0.345
FEET OF PIPE CONTAINING ONE U.S. GALLON	534.7	266.5	133.3	82.0	44.4	26.6	14.8	11.1	6.66	4.40	2.90
WEIGHT PER FOOT (POUNDS)	0.314	0.538	0.738	1.09	1.47	2.2	3.0	3.6	5.0	7.7	10.25

DOUBLE EXTRA HEAVY PIPE DATA

NOMINAL DIAMETER (INCHES)	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3
ACTUAL OUTSIDE DIAMETER (INCHES)	0.840	1.050	1.315	1.660	1.90	2.375	2.875	3.5
ACTUAL INSIDE DIAMETER (OUTSIDE)	0.252	0.434	0.599	0.896	1.10	1.50	1.77	2.30
INSIDE AREA (Square Inches)	0.050	0.148	0.282	0.630	0.950	1.77	2.46	4.15
WORKING Pressure* (P.S.I.)	4666	3910	3629	3068	2807	2560	2446	2285
U.S. GALLONS IN ONE LINEAL FOOT	0.0026	0.0075	0.015	0.033	0.049	0.092	0.127	0.216
FEET OF PIPE CONTAINING ONE U.S. GALLON	381.8	133.2	66.66	30.3	20.2	10.8	7.84	4.53
WEIGHT PER FOOT (POUNDS)	1.71	2.44	3.66	5.21	6.40	9.03	13.7	18.6

*Reference pressure rating-6:1 safety factor


COVERAGE PER GALLON FOR VARIOUS FILM THICKNESSES, RIBBON AND BEAD SIZES



Wet Film Thickness	Gals. /1000 Square Ft.	Square Ft. /Per Gal.
1"	630	1.6
¾"	490	2.0
½"	315	3.0
7/16"	290	3.5
3/8"	240	4.0
5/16"	200	5.0
¼"	160	6.0
3/16"	125	8.0
5/32"	100	10.0
1/8"	80	12.0
3/32"	63	16.0
1/16"	40	25.0
.060" (60 mils)	40	26.0
1/32"	20	50.0
.030" (30 mils)	20	52.0
.015" (15 mils)	10	170.0
.010" (10 mils)	6.5	160.0
.005" (5 mils)	3.1	320.0
.003" (3 mils)	1.5	533.0
.001" (1 mils)	2/3	1600.0



Ribbon size	Gals. /1000 Lineal Ft.	Lineal Ft. Per Gal.
1/1000" x 1"	0.05	19200
10/1000" x 1"	0.050	1920
30/1000" x 1"	1.60	625
60/1000" x 1"	3.20	312
1/64" x 1"	.80	1200
1/32" x 1"	1.70	600
1/16" x 1"	3.30	300
1/8" x 1"	6.50	150
¼" x 1"	13.00	75
½" x 1"	26.00	37




Bead Size (Dia.)	Gals. /1000 Lineal Ft.	Lineal Ft. Per Gal.
1/16"	0.16	6000
3/32"	0.36	27000
1/8"	0.64	15000
3/16"	1.44	675
¼"	2.55	375
5/16"	3.98	240
3/8"	5.74	165
½"	10.20	95
5/8"	15.92	50
¾"	22.95	35
1"	40.80	19


DRUM SPECIFICATIONS

Excerpts from American Standards Association, Inc. Specifications For Metal Drum and Pails, MH 2.1-1959 through MH 2.10-1959; MH 2.11-1960 through MH 2.14-1960. Sponsor —Steel Shipping Container Institute.

Full Removable Head Universal Drums

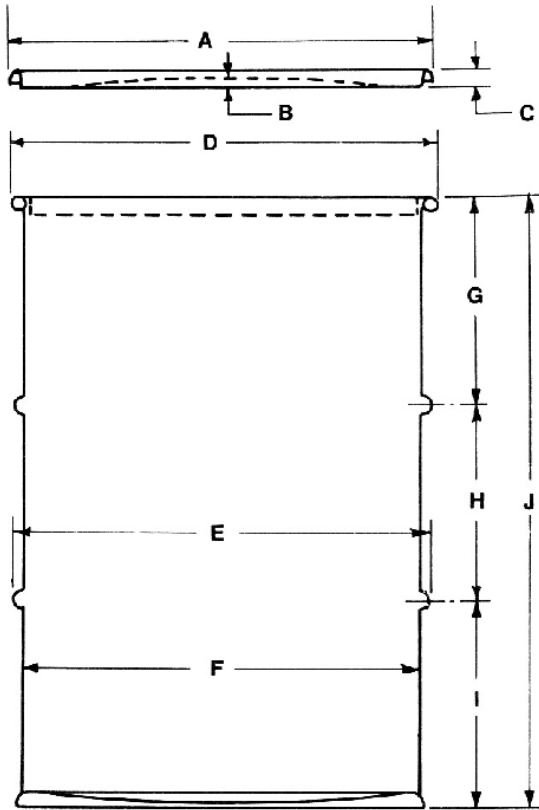

*Canadian 220 liter drum I.D. is 22-1/2".



Detail of configuration for three-rolling hoop 55-gal. drum.

Size	Imperial Size	Volume (Gal. U.S.)	Body Materials	Dimensions (inches)									
				A	B	C	D	E	F	G	H	I	J
55-gal (US)	45-gal	57.2-57.75	Steel 18 gage	23 11/16		7/8	23 1/2	23 17/32	22 1/2	11 7/8	11	11 7/8	34 3/4
55-gal (US)	45-gal	59.28-59.85	Steel 18 gage	23 11/16		7/8	23 1/2	23 17/32	22 1/2	12 1/2	11	12 1/2	36
55-gal (US)	45-gal	57.2-57.75	Steel 18 gage	23 11/16	3/8	7/8	23 1/2	23 17/32	22 1/2		11	11 11/16	34 3/8
30-gal (US)	25-gal	31.2-31.45	Steel 18 gage	19 7/16	3/8	7/8	19 1/4	19 19/32	18 1/4	8 7/8	11	8 7/8	28 3/4
30-gal (US)	25-gal	31.2-31.45	Steel 19 gage	19 7/16		7/8	19 1/4	19 19/32	18 1/4	8 7/8	11	8 7/8	28 3/4
16-gal (US)		16	Steel 20 gage	14 3/4		5/8	14 9/16	14 7/8	13 15/16	7 5/8	11	8	26 5/8
16-gal (US)		16.64-16.89	Steel 20 gage	14 3/4		Lug Cover	14 9/16	14 7/8	13 15/16	7 5/8	11	8	26 5/8


* See inset for special dimensions

also 400-lb. Edible fats drum

also 120-lb. Grease drum


DRUM SPECIFICATIONS CONTINUED

**TIGHT HEAD UNIVERSAL DRUMS
(NON-REMOVEABLE COVER)**

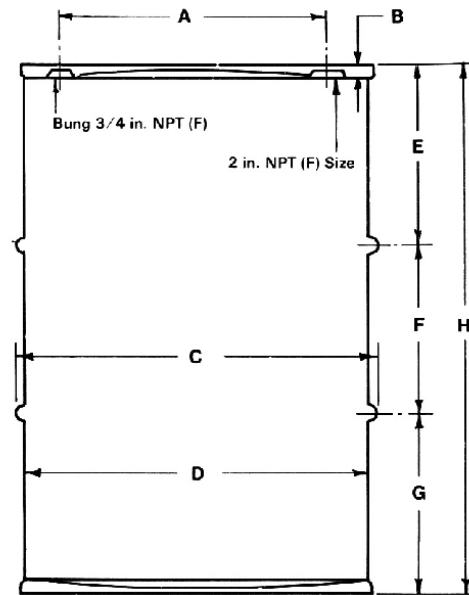

SIZE	Imperial Size	Volume (Gal. U.S.)	Body Material	Dimensions (inches)							
				A	B	C	D	E	F	G	H
55-gal (US)	45-gal	57.2-57.75	Steel 18 gage	17 1/4- 17 3/4	3/4	23 7/16	22 1/2	11 7/8	11	11 7/8	34 3/4
55-gal (US)	45-gal	57.2-57.75	Steel 16 gage	17 1/4- 17 3/4	7/8	23 7/16	22 1/2	12 1/32	11	12 1/32	35 1/16
55-gal (US)	45-gal	57.2-57.75	Steel 16 gage	17 1/4- 17 3/4	3/4	23 7/16	22 1/2	11 29/32	11	11 29/32	34 13/16
30-gal (US)	25-gal	31.2-31.5	Steel 19 gage	13- 13 1/2	3/4	19 3/16	18 1/4	8 15/16	11	8 15/16	28 7/8
16-gal (US)		16.64-16.89	Steel 20 gage	9- 9 3/8		14 7/8	13 15/16	7 7/8	11	8	26 7/8

**5 AND 10-GALLON
UNIVERSAL PAILS**

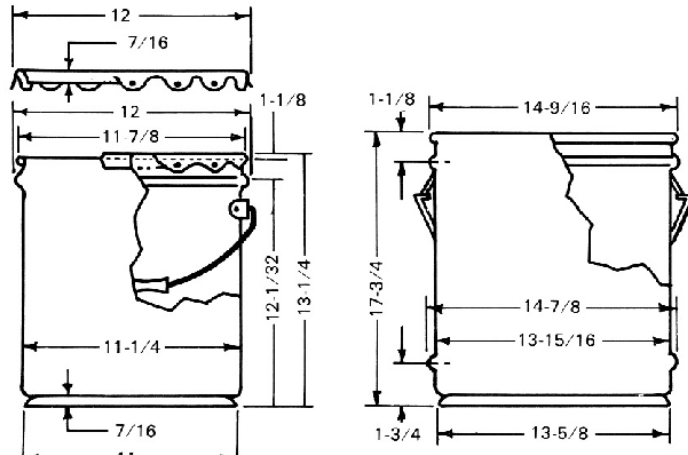

Size	Volume (gals. U.S.)	Body Material
5-gal (U.S.) Lug Cover	5.2-5.45	Steel 24 gage
10-gal. (U.S.) Open Head		Steel 22 gage

Filtration

WHAT IS FILTRATION?

In a hydraulic system filtration is the removal of contaminants from the fluid. The better the filtration, the longer the component life.

In general, the filter that removes the most contaminants is the best filter. The degree of filtration is usually expressed in terms of the size (in microns) of the smallest particle that will not pass through the filter.

In a hydraulic system, a 25-micron filter is adequate. A 10-micron filter is better. A 5-micron is better than a 10 micron. A 2-micron filter is better than a 5-micron filter.


Selection of the ideal filter size depends not only on degree of filtration but also on the cost of filtration. Fine filtration requires almost constant maintenance. It also causes excessive pressure drops, which contribute to inefficiencies in the system. When deciding which filter is most ideal for the Graco type of hydraulic system, all these factors were considered.

The result was the inclusion of a 10-micron element with each return line filter supplied as part of a hydraulic power supply. The 10-micron filter optimizes filtration and efficiency while it minimizes maintenance cost

this filter is located in the return line. It has a W.P. of 300 P.S.I. and shall never be placed in any part of the system where it can be subjected to greater pressures; e.g., up stream side of return line ball valve. Important note: NO valving shall ever be located on the *down-stream side of the return line filter*. By locating this filter in the return line, we can be assured that any contaminants remaining in the tubing after installation shall never reach the vane pump. The return line filter also eliminates the need for high cost-high pressure filters in the supply line.

RELATIVE SIZE OF MICRONIC PARTICLES

MAGNIFICATION 500 TIMES

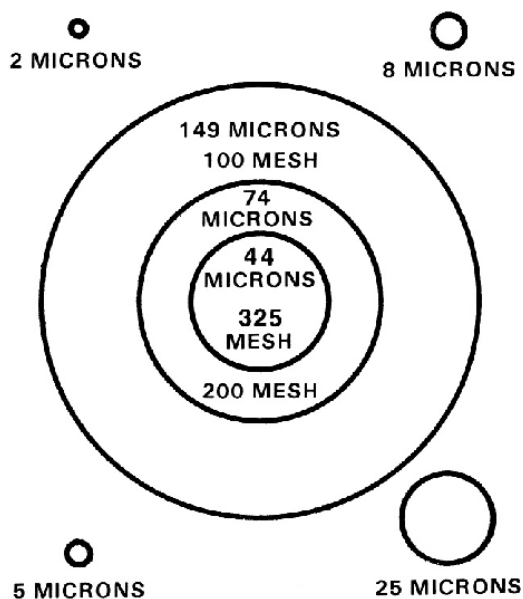

RELATIVE SIZES

Lower Limit of Visibility (Naked Eye).....40 Microns
 White Blood Cells.....25 Microns
 Red Blood Cells..... 8 Microns
 Bacteria (Cocci)..... 2 Microns

LINEAR EQUIVALENTS

1 Inch..... 25.4 Millimeters.....25,400 Microns
 1 Millimeter..... .0394 Inches.....1,000 Microns
 1 Micron.....25,400 of an Inch......001 Millimeters
 1 Micron.....3.94 x 10⁵......0000039 Inches

SCREEN SIZES

Mesher Per Linear Inch	U.S. Sieve No.	Opening In Inches	Opening In Microns
52.36	50	.0117	297
72.45	70	.0083	210
101.01	100	.0059	149
142.86	140	.0041	105
200.00	200	.0029	74
270.26	270	.0021	53
323.00	325	.0017	44
		.00039	10
		.000019	.5

WIRE SCREEN DATA FOR FILTERS

MESH	MICRON	OPENING INCHES	WIRE DIA. INCHES	OPEN AREA
5	3000	.159	.041	36%
7-1/2	1980	.079	.054	35%
10	1480	.075	.025	35%
16	975	.045	.018	34%
20	750	.035	.015	36%
30	500	.022	.011	35%
40	375	.015	.010	36%
50	300	.011	.009	36%
60	238	.010	.0065	30.5%
80	175	.007	—	—
100	149	.006	.0045	30.3%
140	100	.004	—	—
200	74	.0029	.0021	29.2%
250	60	.0024	.0016	36%
270	50	.0021	.0016	32.1%
325	40	.0017	.0014	30.5%
400	35	.0015	—	—